
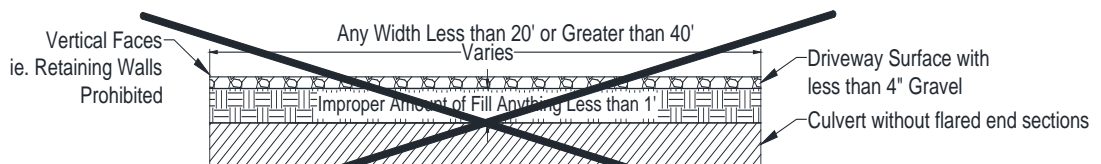
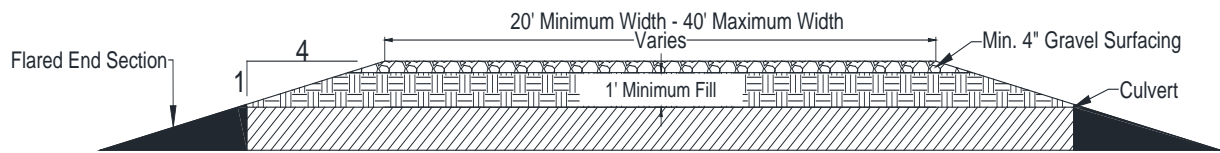


Construction Standards:

- 1) All approaches must be constructed to County Standards and North Dakota Century Code 24-05-21. Failure to do so may result in fines or the removal of the approach.
- 2) 20' Minimum Top width and 40' Maximum width
- 3) 4:1 in-slope Slope Rate (6" and smaller decorative stones are allowed on in-slopes as long as a 4:1 slope is maintained)
- 4) 25' Turning Radius, Both Corners
- 5) 4" Gravel Surfacing (3" Gravel with 4" Hot Bituminous Pavement or 3" Gravel with 4" Portland Concrete Cement are also acceptable surface treatments)
- 6) Flared End Sections are required on all culvert installations
- 7) No decorative vertical end treatments allowed, including but not limited to retaining walls
- 8) Place pipe to match existing ditch grade

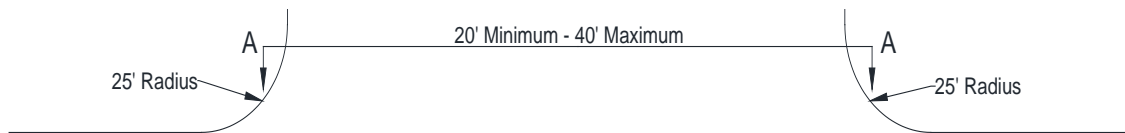

Section A-A
(Improperly Installed Driveway)
Prohibitive under N.D.C.C. Section 24-05-21